



# L19B03W Photomultiplier Tube

The L19B03W is a 3/4" diameter, 10-stage end-on photomultiplier designed for scintillation counting, timing measurements, and other applications where high quantum efficiency, low dark current, good collection efficiency, and gain stability are of paramount importance.

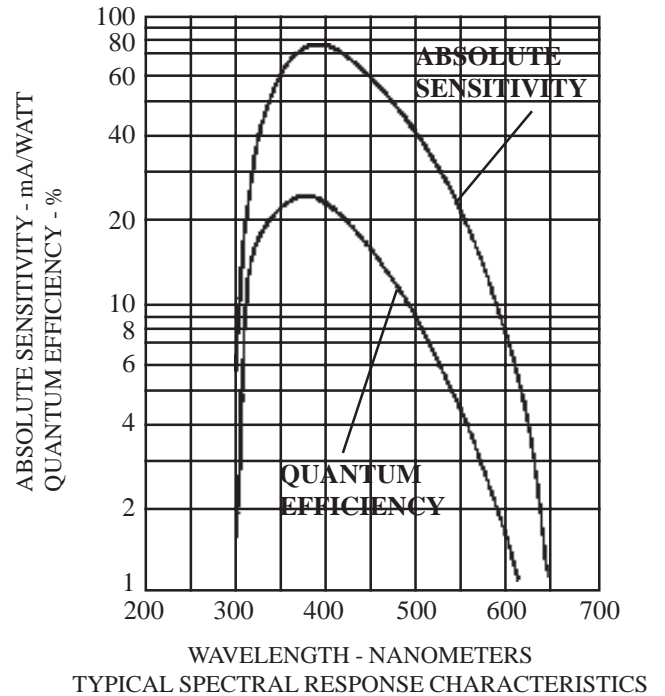

TYPICAL SPECTRAL RESPONSE CHARACTERISTICS

FIGURE 1

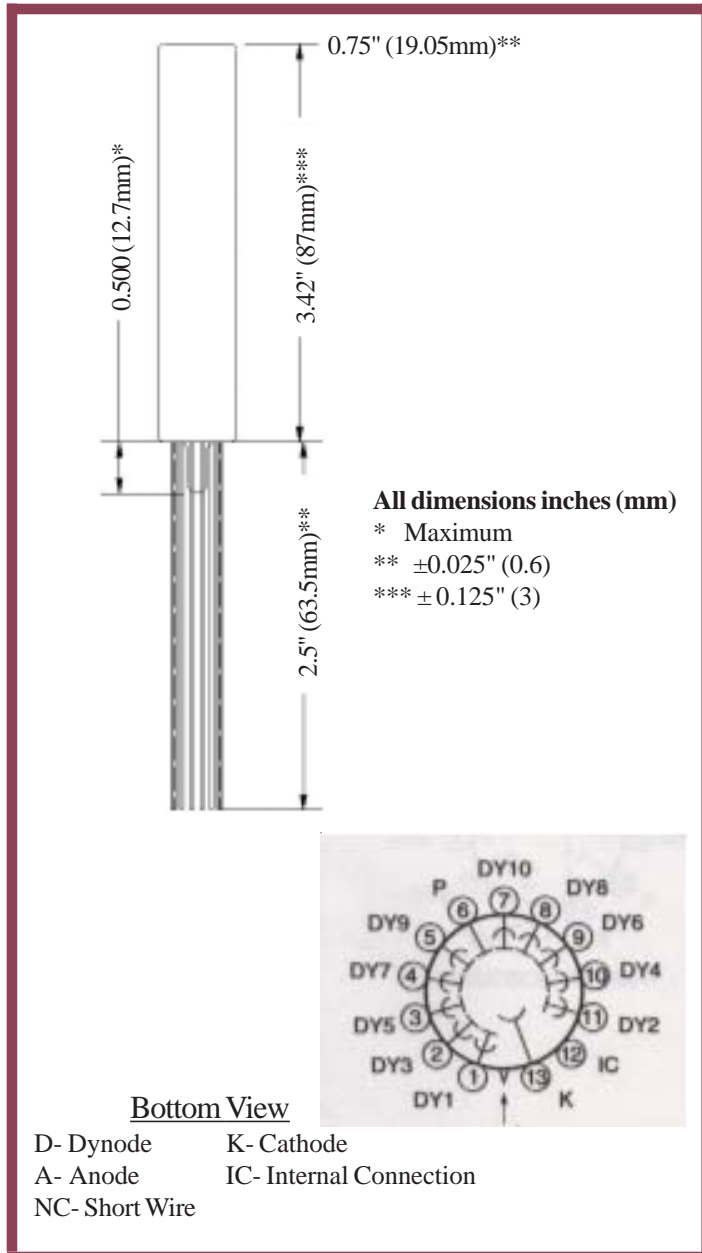

Photocathode: Semitransparent Bialkali	
Spectral Response	See Figure 1
Wavelength of maximum response	400 ± 50 nm
Minimum diameter	15 mm
Window shape	plano-plano, circular
Window index of refraction @ 436 nm	1.523
Dynodes	CsSb, coated Linear
Capacitance (anode to all electrodes)	4 pF
Operating position	Any

Rev. 12/2004

# L19B03W Photomultiplier Tube

## ELECTRICAL OPERATING RATINGS

	MINIMUM	TYPICAL	MAXIMUM <sup>(4)</sup>	UNITS
Cathode to dynode No. 1 voltage	40	150	300	VDC
Cathode to anode voltage		750		VDC
Voltage between consecutive dynodes			250	VDC
Ambient storage temperature		23	60	°C
Anode current, average over 30 sec.		10		μA
Cathode current		0.2		μA
Cathode luminous sensitivity: <sup>(1)</sup> With 2854° K tungsten source	50	90		μA/lm
With blue light source <sup>(2)</sup>	5	10	13	μA/lm(B)
Quantum efficiency @ 420 nm		25		%
Cathode radiant sensitivity @ 420 nm		80		mA/W
Anode luminous sensitivity 800 VDC: With 2854° K tungsten source	10	20	40	A/lm
Current amplification @ 800 VDC		1 X 10 <sup>6</sup>		
Anode dark current <sup>(3)</sup> @ 22° C	0.5	5	50	nA
Plateau width @ 40 mV threshold (approx. 100 keV) with <sup>137</sup> Cs source		180		Volts
Pulse Height Resolution		7		%
Rise Time		1.5		nsec

(1) With 150 VDC between cathode and all other elements connected as anode.

(2) This measurement is made with a blue filter (Corning CS-5-58, 1/2 stock thickness) interposed between a calibrated 2854° K tungsten light source and the photocathode. The (B) appearing in the units signifies that the measurement is made with the blue filter in place.

(3) Measured at the supply voltage which gives an anode sensitivity of 20 A/lm.

(4) Recommended operating maximums.

Voltage dividers available made to customer specifications.

### **BASING OPTIONS:**

W - Wire Leads (No Base)



P.O. Box 870 • 300 Crane • Sweetwater, Texas 79556  
800-399-4557 • 325-235-1418 • Fax: 325-235-2872 • E-mail: adit@aditpmt.com • Website: www.aditpmt.com